

*Non-wetting fog creates
a cool space like an artificial tree*

Fog Parasol

**A large parasol offers shade,
Non-wetting fog gently cools the area...**

**In the hot summer sun, in hot weather,
Fog Parasol provides a cool, comfortable space.**



いけうち

“The Fog Engineers”

H. IKEUCHI & CO., LTD.

What is the Fog Parasol?

Attached to the parasol are nozzles which spray a "Semi-Dry Fog", pleasant fog that creates a cool space under and around the parasol.

"Semi-Dry Fog" is so fine that it does not cause wetting when touched. When it touches your clothes and skin, it quickly evaporates without wetting, and only refreshing coolness remains.

Features of the Fog Parasol

Fog Parasol can be used anywhere without worry.

Installation is easy. All you need to run it is just tap water and connection to a household power outlet (AC100V-240V).

When not in use, Fog Parasol can be easily folded and stored compactly.

Usage/Places

- Seaside
- Parks
- Gardens
- Sports facilities
- Outdoor summer events
- School grounds

Structure of Fog Parasol

It consists of 3 sections – The parasol and nozzles, the parasol base and the pump.


Just connect the parasol and base and pump, and it can be used immediately.

Easy for anyone to assemble!

Installation




Push the handle and extend the arm fully.

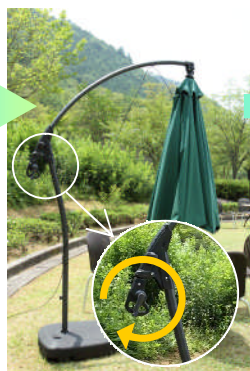

Turn the handle to open the parasol.



Connect to the pump with provided tube.

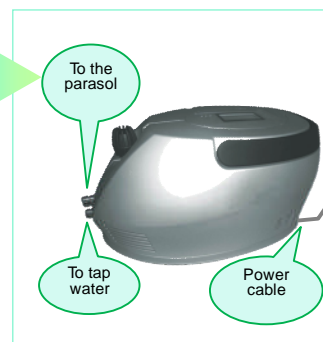

Connect the pump and tap water, and turn on the switch to start spraying.

NOTE:

- First assemble the base and attach the pole to the parasol unit, then continue installation.
- Strong winds could cause the Fog Parasol to fall over. Avoid use on very windy days.

Specifications

Parasol : Octagonal cantilever parasol, open/close with handle. Width 3m x Height 2.6m (open), Mass about 12kg.
8 nozzles mounted, which spray about 280cc per min.

Pump : Power supply 100-240V (50Hz/60Hz), Power consumption 120W,

Max. pressure 5.0MPa, Mass about 6kg (without water) Note: Pump type may be changed for using several parasol units together.

Base : Mass about 48kg. Note: Shape of base is subject to change.

Connecting tube : For pump connection. Approx. 3m.

For details or any inquiry please feel free to contact our sales office or mail us at overseas@kirinoikeuchi.co.jp.

 "The Fog Engineers"
H. IKEUCHI & CO., LTD.

ISO9001:2008 certified

Headquarters

Daiichi Kyogyo Bldg., 1-15-15, Awaza
Nishi-ku, Osaka 550-0011, Japan
Tel: 81-6-6538-4015 Fax: 81-6-6538-4022
E-mail: overseas@kirinoikeuchi.co.jp
URL: <http://www.kirinoikeuchi.co.jp/eng/>

IKEUCHI (SHANGHAI) CO., LTD.

Room 1311, Building A, North Region Commercial Plaza, 988 Da Tong Road, Zha Bei District, Shanghai 200070, P.R.China
Tel: 86-21-6140-9731 Fax: 86-21-6123-4239 E-mail: mist@kirinoikeuchi.com URL: <http://www.kirinoikeuchi.com/>
Tianjin Branch Tel: +86-22-2320-1676 Fax: +86-22-2320-1675

IKEUCHI USA, INC.

8110 Beckett Center Drive, West Chester, OH 45069 USA
Tel: 1-513-942-3060 Fax: 1-513-942-3064 E-mail: info@ikeuchiusa.com URL: <http://www.ikeuchiusa.com/>

IKEUCHI EUROPE B.V.

Asterweg 17 A6, 1031 HL Amsterdam, The Netherlands
Tel: 31-20-820-2175 Fax: 31-20-820-2176 E-mail: info@ikeuchieurope.com URL: <http://www.ikeuchieurope.com/>

IKEUCHI TAIWAN CO., LTD.

11 F-1, No.27, Sec.1, Chung Shan N. Rd., Taipei, 10441 Taiwan, R.O.C.
Tel: 886-2-2511-6289 Fax: 886-2-2541-6392 E-mail: sales@ikeuchi.com.tw URL: <http://www.ikeuchi.com.tw/>

PT. IKEUCHI INDONESIA

Jl. Gunung Panderman Blok E No. 9, Lippo Cikarang, Bekasi 17550, Indonesia
Tel: 62-21-2909-3246 Fax: 62-21-2909-3247 E-mail: sales@ikeuchi.co.id